


SURVEY SPECIFICATIONS		PROCESSING	
Date flown	1994	Data reduction by	World Geoscience Corp. Ltd
Flown by	World Geoscience Corp. Ltd	GRF	1990
Flight line spacing	400 m	Geodetic datum	AGD66
Flight line direction	90 - 270 degrees	Map projection	Transverse Mercator AMG51
Tie line spacing	4000 m	Gridding by	GSWA (Intersect 3.0)
Tie line direction	0 - 180 degrees	Grid cell	80 m
Terrain clearance	80 m	Image processing by	GSWA (ER Mapper 5.1)
Navigation	GPS	Illumination	Azimuth 45 Elevation 45
Sample interval	7 m		
		Compiled by	J.H. Watt
		Geophysical project manager	G. Steemson


Published by the Geological Survey of Western Australia. Copies available from Mining Information Centre, Department of Minerals and Energy, 100 Plain Street, EAST PERTH, WA 6004.  
Phone (09) 222 3459, Fax (09) 222 3444

Digital data available from AGSO Geophysical Mapping, GPO Box 378, CANBERRA, ACT 2601.  
Phone (06) 249 9223, Fax (06) 249 9986

The recommended reference for this map is: GEOLOGICAL SURVEY OF WESTERN AUSTRALIA, 1996, Urarey, W.A., Sheet 3343: Western Australia Geological Survey, Total Magnetic Intensity image.

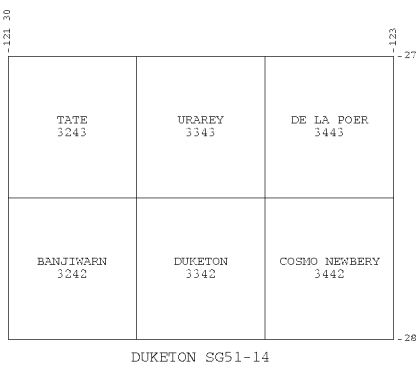

WARNING: inks will fade with prolonged exposure to light.



DEPARTMENT OF MINERALS AND ENERGY  
HOWARD CARP, M.B.E.  
MINISTER FOR MINES  
K.R. PERRY, DIRECTOR GENERAL




AUSTRALIAN  
GEOLOGICAL SURVEY  
ORGANISATION



PETER DOUG  
DIRECTOR, GEOLOGICAL SURVEY  
OF WESTERN AUSTRALIA

**NGMA**  
PRODUCT OF THE NATIONAL  
GEOSCIENCE MAPPING ACCORD



URAREY Sheet 3343  
Total Magnetic Intensity

First edition  
(c) 1996 Western Australia