

SURVEY SPECIFICATIONS

Date flown Nov 1980 - Feb 1991
Flown by World Geoscience Corp.
Flight line spacing 400 m
Flight line direction 90 - 270 degrees
Tie line spacing 4000 m
Tie line direction 0 - 180 degrees
Terrain clearance 60 m
Navigation Visual
Sample interval 12 m


PROCESSING

Date reduction by World Geoscience Corp.
Geodetic datum Removed
Map projection Transverse Mercator AMG 51
Gridding by GSWA (Intrepid v3.1)
Grid cell 100 m
Image processing by GSWA (ER Mapper v5.1)
Illumination Azimuth 45
Elevation 45
Compiled by J.H. Watt
Geophysical project manager Dr. T. J. Griffin

Published by the Geological Survey of Western Australia. Copies available from the Mining Information Centre, Department of Minerals and Energy, 100 Plain Street, East Perth, WA 6004. Phone (08) 222 3458, Fax (08) 222 3444

Digital data available from AGSO Geophysical Mapping, GPO Box 378, CANBERRA, ACT 2601. Phone (06) 243 9223, Fax (06) 248 1886

The recommended reference for this map is: GEOLOGICAL SURVEY OF WESTERN AUSTRALIA, 1986, Lake Violet, W.A., Sheet 3044, Western Australia Geological Survey, Total Magnetic Intensity Image.

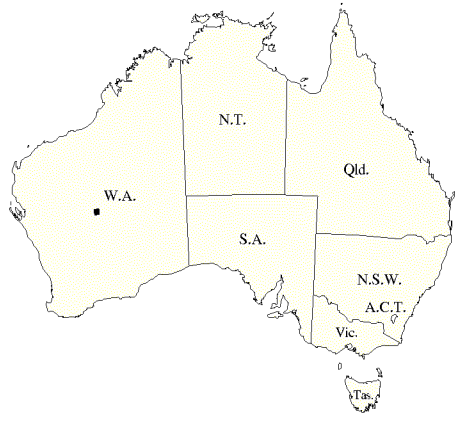

SHEET INDEX

QUINPU 2945	MILLROSE 3045	BALLIMORE 3145
WILUNA 2944	LAKE VIOLET 3044	SANDALWOOD 3144

WARNING: Inks are water soluble and will fade with prolonged exposure to light



GOVERNMENT OF WESTERN AUSTRALIA
HON. ALVIN MASON, M.L.A.
MINISTER FOR MINES



DEPARTMENT OF MINERALS AND ENERGY
K.R. PERRY, DIRECTOR GENERAL




AGSO
AUSTRALIAN GEOLOGICAL SURVEY OF OCEANIA



PETER GILL
DIRECTOR, GEOLOGICAL SURVEY
OF WESTERN AUSTRALIA

NGMA

PRODUCT OF THE NATIONAL
GEOSCIENCE MAPPING ACCORD



TRANSVERSE MERCATOR PROJECTION
Grid lines indicate 10 000 metre interval of the Australian Map Grid Zone 51

LAKE VIOLET
SHEET 3044

Total Magnetic Intensity

FIRST EDITION 1996
© Western Australia