

SURVEY SPECIFICATIONS

Date flown 1993
Flown by AGSO
Flight line spacing 400 m
Flight line direction 90 - 270 degrees
Tie line spacing 4000 m
Tie line direction 0 - 180 degrees
Terrain clearance 100 m
Navigation GPS
Sample interval 7 m


PROCESSING

Data reduction by AGSO
IGRF Removed
Geodetic datum AGD68
Map projection Transverse Mercator AMG 51
Grid cell GSWA (Intrepid v5.1) 100 m
Image processing by GSWA (ER Mapper v5.1)
Illumination Azimuth 45
Elevation 45
Compiled by J.H. Watt
Geophysical project manager G. Steenson

Published by the Geological Survey of Western Australia. Copies available from the Mining Information Centre, Department of Minerals and Energy, 100 Plain Street, East Perth, WA 6004. Phone (08) 222 3459, Fax (08) 222 3444.

Digital data available from AGSO Geophysical Mapping, GPO Box 378, CANBERRA, ACT 2601. Phone (06) 249 9223, Fax (06) 249 9988.

The recommended reference for this map is: GEOLOGICAL SURVEY OF WESTERN AUSTRALIA, 1986, Wanggannoo, W.A., Sheet 3143, Western Australia Geological Survey, Total Magnetic Intensity Image.

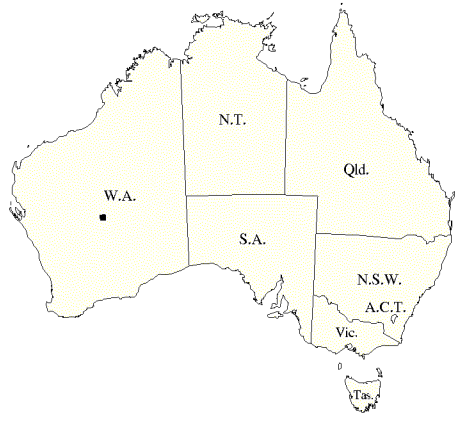

SHEET INDEX

YELLERRE 2943	MOUNT KEITH 3043	WANGGANNOO 3143
DEPOT SPRINGS 2942	SIR SAMUEL 3042	DARLOTT 3142

WARNING: Inks are water soluble and will fade with prolonged exposure to light



GOVERNMENT OF WESTERN AUSTRALIA
HON. ALVIN MASON, M.L.A.
MINISTER FOR MINES



DEPARTMENT OF MINERALS AND ENERGY
K.R. PERRY, DIRECTOR GENERAL




AGSO
AUSTRALIAN GEOLOGICAL SURVEY OF WESTERN AUSTRALIA



PETER GILL
DIRECTOR, GEOLOGICAL SURVEY
OF WESTERN AUSTRALIA

NGMA

PRODUCT OF THE NATIONAL
GEOSCIENCE MAPPING ACCORD



TRANSVERSE MERCATOR PROJECTION
Grid lines indicate 10 000 metre interval of the Australian Map Grid Zone 51

WANGGANNOO
SHEET 3143

Total Magnetic Intensity

FIRST EDITION 1996
© Western Australia